

SISO Twister


"Twister"

Item no. 06.11.100 - consisting of:

1 pce. of black mounting plate Ø107mm x 25mm

1 pce. of nut M8 thread

1 pce. of black linkplate Ø61mm x 9mm

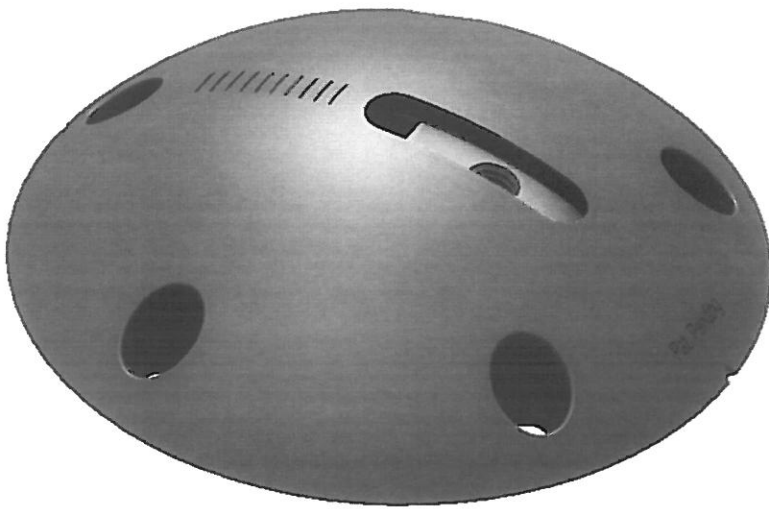


Needed accessories for one set of Twister:


5 pcs. of suited mounting screws. Ø5mm screw, CSK, head diameter <10,30mm.

1 pce. of leg - any type metal or wood. Leg diameter at the Twister link plate <53mm.

M8 thread - length from 15mm to 22 mm - metal or wood leg.

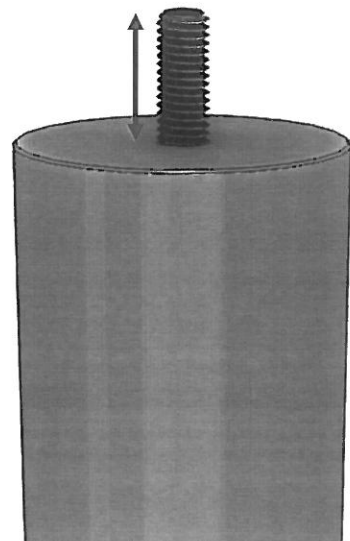


Twister operates from a 90° angle to a 70° angle - 20° of steepless adjustment.

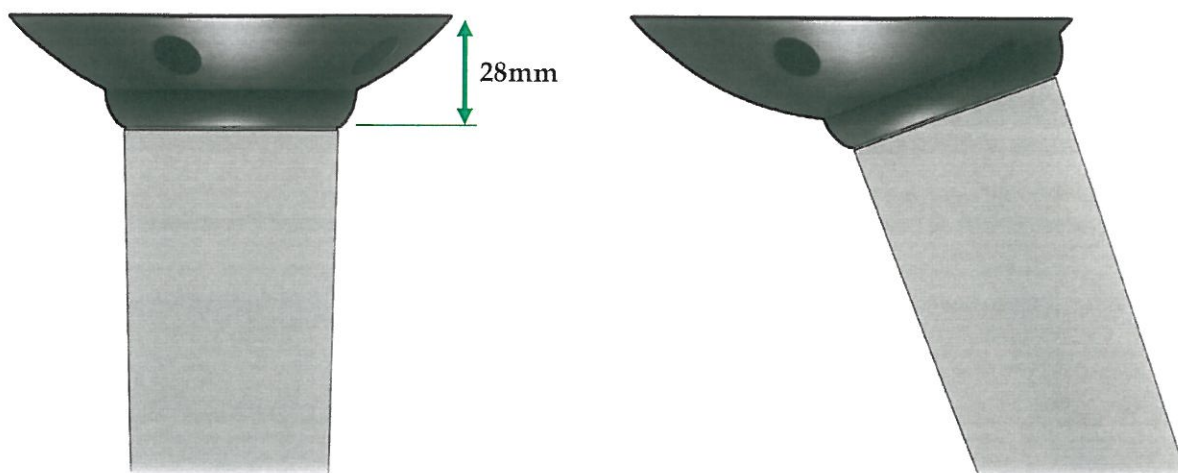


Steps when mounting:

Step #1 - Place and fasten the mounting plate.

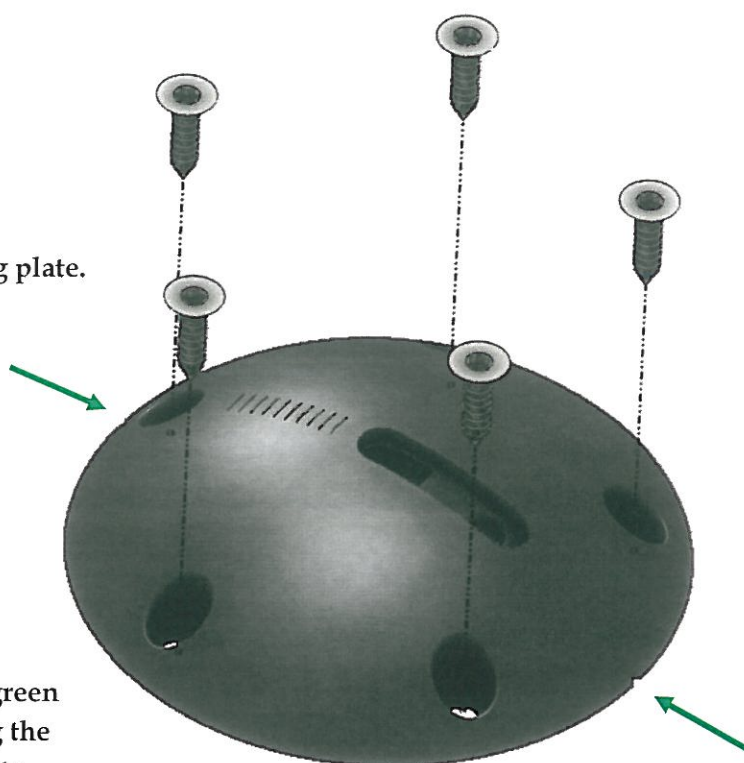


Tip : The two notches - indicated by green arrows - may be helpful when finding the optimal position for the mounting plate.

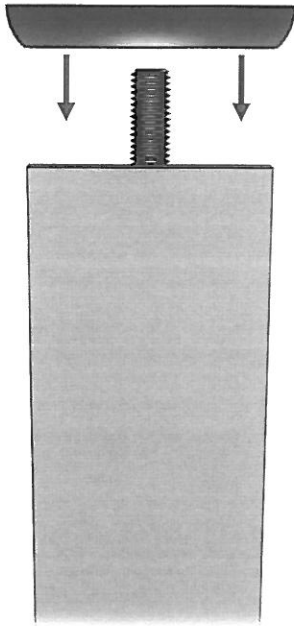

Step #2 - Place the linkplate on top of the leg.

Step #3 - Tighten the leg and linkplate onto the mounting plate. Adjust and tighten in the desired angel.

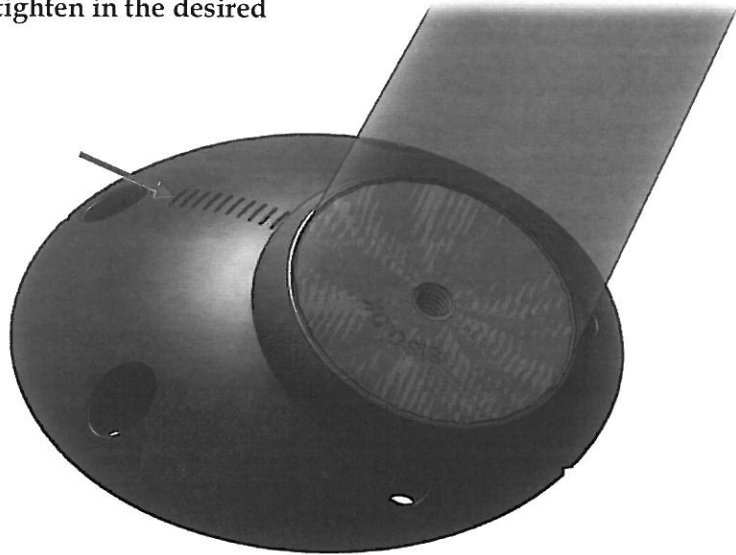

Tip : Use the indicators on the top of the mounting plate in order to make a precise positioning of the leg. Indicated by the green arrow.